





AG 150

150

BMW B2 4006		PSA E24.54.815.G
MB B8 3180 220 000 001	GM 90.25.00	RENAULT EM24.54.700
VW 39D 878		

**MOLDIS**

mould and die sets

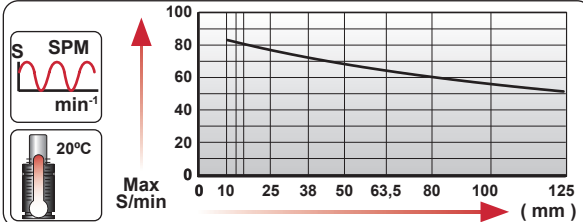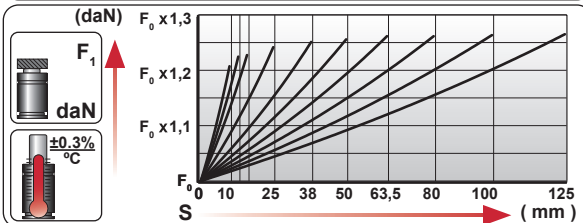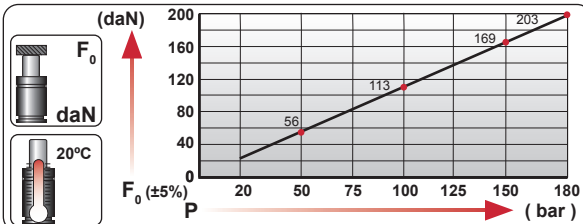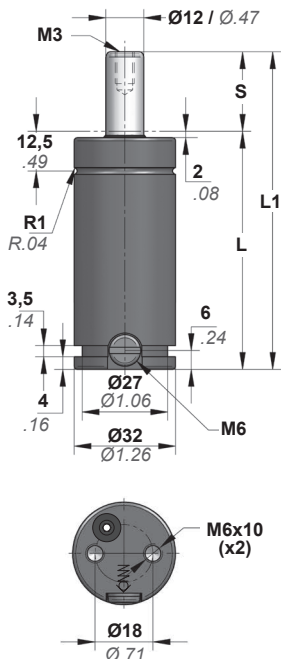

БЕЗОПАСНОСТЬ VDI



СТАНДАРТ




3AKA3	S		L1 ±0.25		L			
	mm	inch	mm	inch	mm	inch	Kg.	lb
AG --- 010	10	0.39	70	2.76	60	2.36	0.27	0.60
AG --- 012	12.7	0.50	75.4	2.97	62.7	2.47	0.28	0.62
AG --- 016	16	0.63	82	3.23	66	2.60	0.29	0.64
AG --- 025	25	0.98	100	3.94	75	2.95	0.32	0.71
AG --- 038	38	1.50	126	4.96	88	3.46	0.36	0.79
AG --- 050	50	1.97	150	5.91	100	3.94	0.39	0.86
AG --- 063	63.5	2.50	177	6.97	113.5	4.47	0.44	0.97
AG --- 080	80	3.15	210	8.27	130	5.12	0.49	1.08
AG --- 100	100	3.94	250	9.84	150	5.91	0.55	1.21
AG --- 125	125	4.92	300	11.81	175	6.89	0.62	1.37


ЗАКАЗ	ЦЕТА	P	
		bar	psi
AG 50 050		45	650
AG 100 050		90	1305
AG 150 050		135	1960
AG 200 050		180	2610
AG XXX 050		20-180	290-2610

ЗАКАЗ	F ₀ Начальное усилие ±5% 20°C 68°F		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие	
	daN	lb	daN	lb
AG 50 050	50	112	65	146
AG 100 050	100	225	125	281
AG 150 050	150	337	190	427
AG 200 050	200	450	250	562
AG XXX 050	23-200	52-450	30-250	67-562

ТЕХНИЧЕСКИЕ ДАННЫЕ



Газ

N₂

Pmin Pmax
0000 1 0005


20°C / 68°F

Tmin Tmax

менение силы

Изменение силы в зависимости от температуры

20 bar	180 bar
290 psi	2610 psi
0 °C	80 °C
32 °F	176 °F





арядка
даптер

мнение

ПАКТ

06 CG 2-Q

 mm	 50	 50		 50	 50	 50	 50	 50
 mm	 Ø32	 Ø32		 Ø32	 Ø32	 Ø32	 Ø32	 Ø32
 mm	 L1=142	 L1=140		 L1=137	 L1=150	 L1=150	 L1=155	 L1=195
МОДЕЛЬ	AFT	CW 350 KZ 350		CT 300 CK 300	CM 350 CD 300	AG 150	CP 500	CS 770

ВАРИАНТЫ КРЕПЛЕНИЯ					
	Вставка  +1,0 Ø+0,5 Min. 80%L	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление 
КАК ЗАКАЗАТЬ		A14-032 580 A34-032 582		C20-032 598	D02-032 600