

AG 250

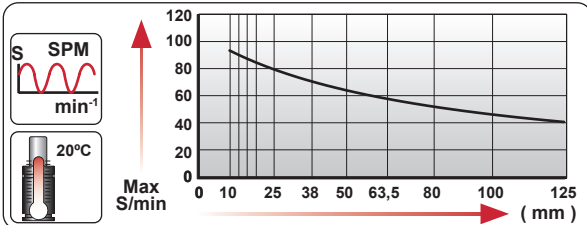
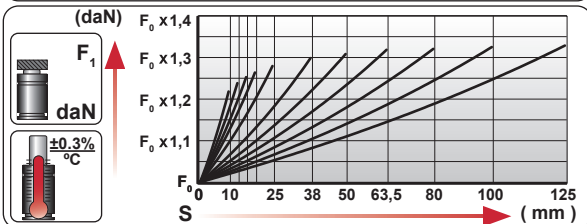
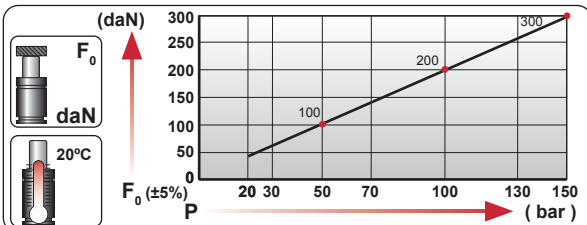
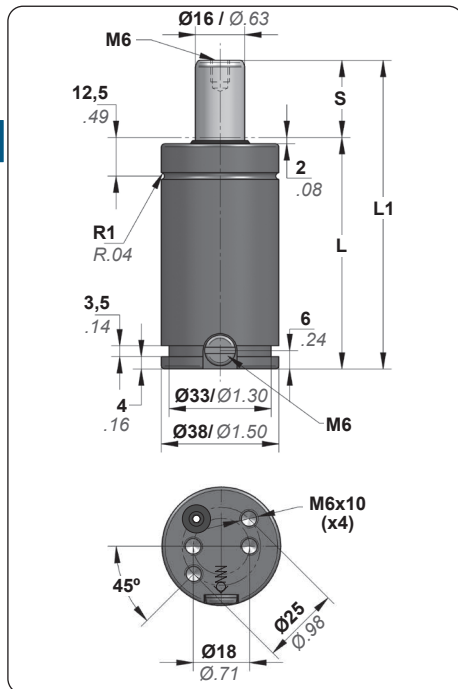
ISO

BMW B2 4006	FORD W-DX35-6203	PSA E24.54.815.G
	GM 90.25.00	RENAULT EM24.54.700
VW 39D 878		NISSAN K32S0



MOLDIS

mould and die sets

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	Kg.	lb
AG 250 010	10	0.39	70	2.76	60	2.36	250 ±5% 125 bar 1810 psi at 20°C 68°F	562	305	685	11	0.7	0.39	0.86
AG 250 013	13	0.51	76	2.99	63	2.48			310	696	14	0.8	0.40	0.88
AG 250 016	16	0.63	82	3.23	66	2.60			313	704	16	1.0	0.41	0.90
AG 250 019	19	0.75	88	3.46	69	2.72			316	710	18	1.1	0.43	0.95
AG 250 025	25	0.98	100	3.94	75	2.95			320	719	23	1.4	0.45	0.99
AG 250 038	38	1.50	126	4.96	88	3.46			325	730	33	2.0	0.51	1.12
AG 250 050	50	1.97	150	5.91	100	3.94			327	735	43	2.6	0.56	1.23
AG 250 063	63.5	2.50	177	6.97	113.5	4.47			329	739	53	3.2	0.62	1.37
AG 250 080	80	3.15	210	8.27	130	5.12			330	742	66	4.0	0.69	1.52
AG 250 100	100	3.94	250	9.84	150	5.91			331	745	82	5.0	0.77	1.70
AG 250 125	125	4.92	300	11.81	175	6.89			332	747	102	6.2	0.88	1.94

ТЕХНИЧЕСКИЕ ДАННЫЕ

 Газ N ₂ Smax Vmax	 Pmin Pmax 20°C / 68°F Tmin Tmax Изменение силы в зависимости от температуры	 20 bar 290 psi 0 °C 32 °F 150 bar 2175 psi 80 °C 176 °F ±0,3% / °C	 Зарядка Адаптер Соединение Комплект картриджей	06 CG 2-Q AG-H 250 XXX 1630B205B

**MOLDIS**


mould and die sets

AG 250

ISO

  								
		Ø38	Ø38	Ø38	Ø38	Ø38	Ø38	Ø38
		L1=130 L1=140	L1=150	L1=132 L1=137 L1=150	L1=150 L1=155	L1=150	L1=155 L1=160	L1=230
МОДЕЛЬ		CW 500 KZ 500	AS 300	CT 500 CK 500 FD 300	CD 500 CM 500	AG 250	CPH 850 CP 1000	CS 1000

ВАРИАНТЫ КРЕПЛЕНИЯ

	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление 
	КАК ЗАКАЗАТЬ	A14-038  580 A34-038  582		C05-038  596 C20-038  598	D02-038  600 D67-038  602