

AG 500



ISO

BMW	B2 4006		PSA	E24.54.815.G
MB	B8 3180 220 000 001	GM	90.25.00	RENAULT EM24.54.700
VW	39D 878		NISSAN	K32S0



MOLDIS

mould and die sets

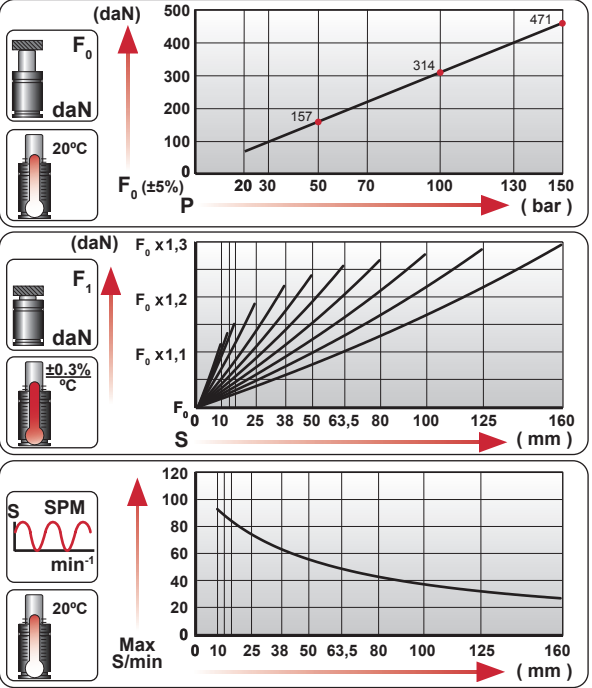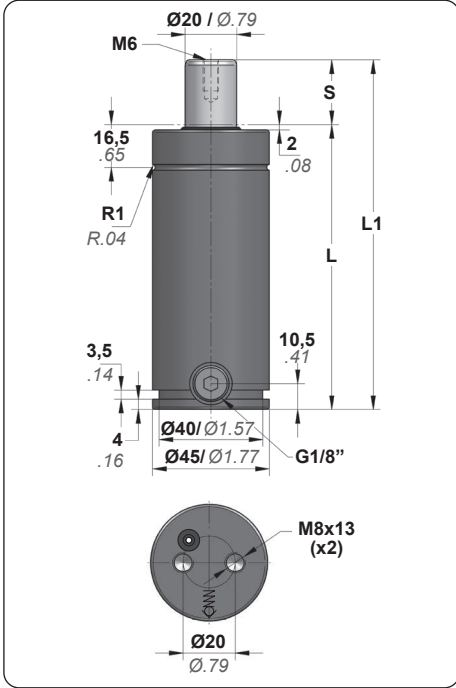


БЕЗОПАСНОСТЬ VDI

СТАНДАРТ

EM.24.54

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	Kg.	lb
AG 500 010	10	0.39	105	4.13	95	3.74	470 1057 ±5% 150 bar 2175 psi at 20°C 68°F		516	1161	35	2.1	0.83	1.83
AG 500 013	13	0.51	111	4.37	98	3.86			525	1181	39	2.4	0.85	1.87
AG 500 016	16	0.63	117	4.61	101	3.98			533	1198	43	2.6	0.86	1.90
AG 500 025	25	0.98	135	5.31	110	4.33			550	1236	54	3.3	0.91	2.01
AG 500 038	38	1.50	161	6.34	123	4.84			566	1272	71	4.3	0.97	2.14
AG 500 050	50	1.97	185	7.28	135	5.31			575	1294	86	5.2	1.03	2.27
AG 500 063	63.5	2.50	212	8.35	148.5	5.85			583	1311	103	6.3	1.10	2.43
AG 500 080	80	3.15	245	9.65	165	6.50			590	1326	124	7.6	1.18	2.60
AG 500 100	100	3.94	285	11.22	185	7.28			595	1339	149	9.1	1.28	2.82
AG 500 125	125	4.92	335	13.19	210	8.27			600	1350	181	11.0	1.41	3.11
AG 500 160	160	6.30	405	15.94	245	9.65			605	1360	225	13.7	1.58	3.48

								
								
		  		  	 			
МОДЕЛЬ		CW 750 CWC 750 KZ 750		CT 700 CK 750 FD 500	CM 600 CD 700	AG 500	CPH 1250	

ВАРИАНТЫ КРЕПЛЕНИЯ					
	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление 
КАК ЗАКАЗАТЬ		A14-045  581 A34-045  582	B21-045  590 B76-045  594	C05-045  596 C20-045  598	D02-045  600 D67-045  602