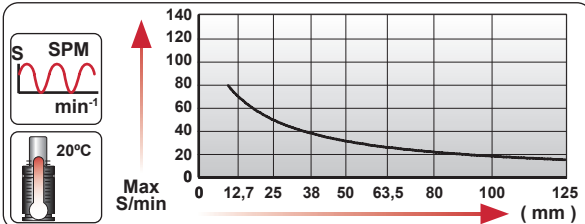
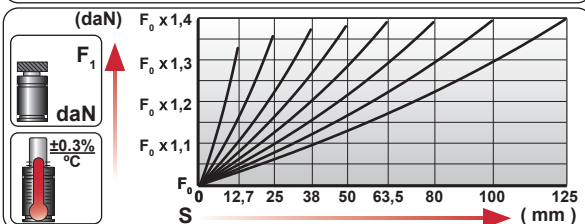
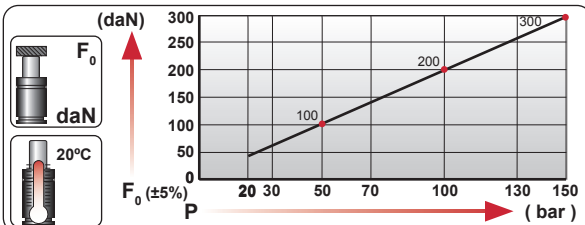
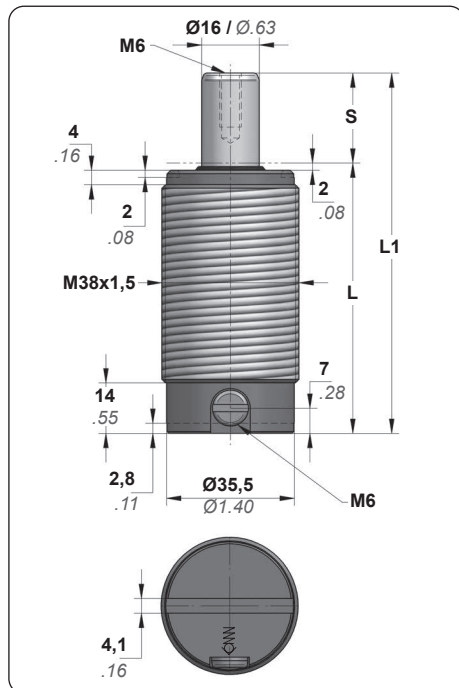


**MOLDIS**

mould and die sets

AS 300

С резьбой

**БЕЗОПАСНОСТЬ
VDI****СТАНДАРТ**

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
AS 300 012	12.7	0.50	75.4	2.97	62.7	2.47	300	674	395	888	11	0.6	0.42	0.93
AS 300 025	25	0.98	100	3.94	75	2.95	±5% 150 bar 2175 psi at 20°C 68°F		407	915	19	1.2	0.48	1.06
AS 300 038	38	1.50	126	4.96	88	3.46			412	925	28	1.7	0.54	1.19
AS 300 050	50	1.97	150	5.91	100	3.94			414	931	36	2.2	0.60	1.32
AS 300 063	63.5	2.50	177	6.97	113.5	4.47			416	935	46	2.8	0.67	1.48
AS 300 080	80	3.15	210	8.27	130	5.12			417	937	57	3.5	0.75	1.65
AS 300 100	100	3.94	250	9.84	150	5.91			418	940	71	4.3	0.85	1.87
AS 300 125	125	4.92	300	11.81	175	6.89			419	942	89	5.4	0.98	2.16

ВАРИАНТЫ КРЕПЛЕНИЯ

Верхнее крепление

E58-038

604

E68-038

604

КАК ЗАКАЗАТЬ

ТЕХНИЧЕСКИЕ ДАННЫЕ

	Газ	N ₂		Pmin Pmax 20°C / 68°F	20 bar 290 psi	150 bar 2175 psi		Tmin Tmax 0 °C 32 °F	80 °C 176 °F		Зарядка Адаптер	06 CG 2-Q
	Smax	< 90%		Tmin Tmax	0 °C 32 °F	80 °C 176 °F					Соединение	X
	Vmax	1,6 m/s		Изменение силы в зависимости от температуры	±0,3% / °C			Комплект картриджей		1628C205B		