






ASP 250

С резьбой



MOLDIS

mould and die sets

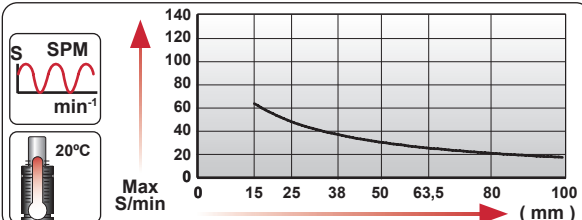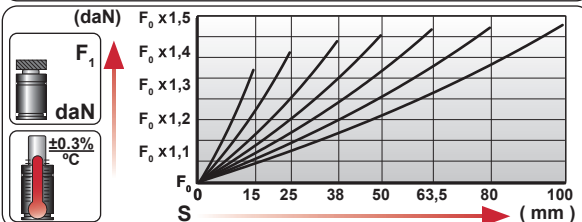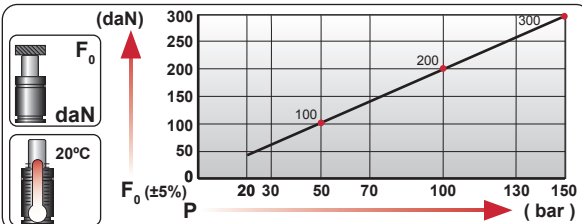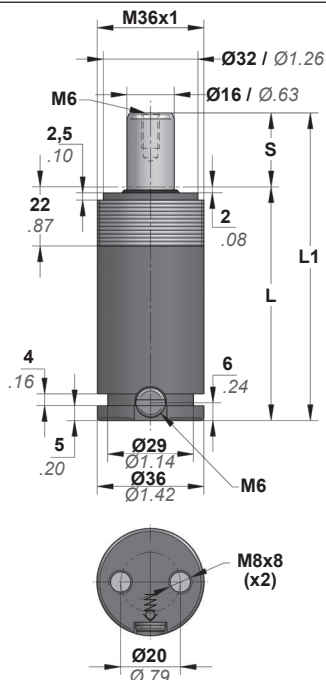

БЕЗОПАСНОСТЬ VDI



СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
ASP 250 015	15	0.59	84	3.31	69	2.72	250	562	318	714	14	0.9	0.39	0.86
ASP 250 025	25	0.98	104	4.09	79	3.11	±5% 125 bar 1810 psi at 20°C 68°F	328	738	21	1.3	0.43	0.95	
ASP 250 038	38	1.50	130	5.12	92	3.62		335	753	30	1.8	0.49	1.08	
ASP 250 050	50	1.97	154	6.06	104	4.09		338	761	38	2.3	0.53	1.17	
ASP 250 063	63.5	2.50	181	7.13	117.5	4.63		341	767	48	2.9	0.59	1.30	
ASP 250 080	80	3.15	214	8.43	134	5.28		343	771	59	3.6	0.66	1.46	
ASP 250 100	100	3.94	254	10.00	154	6.06	345	775	73	4.5	0.74	1.63		

ВАРИАНТЫ КРЕПЛЕНИЯ



Верхнее крепление

E03-036



КАК ЗАКАЗАТЬ

ТЕХНИЧЕСКИЕ ДАННЫЕ



Га:

N₂

Pmin Pmax
20°C / 68°F

Tmin Tmax



Изменение силы в зависимости от температуры

20 bar **150 bar**
290 psi *2175 psi*

0 °C	80 °C
------	-------

0.00% 100



Зарядка
Адаптер

06 CG 2-Q



Дополнение



Комплект картриджей

100000050



View

1.2. l