








MOLDIS

mould and die sets

ASP 300

С резьбой

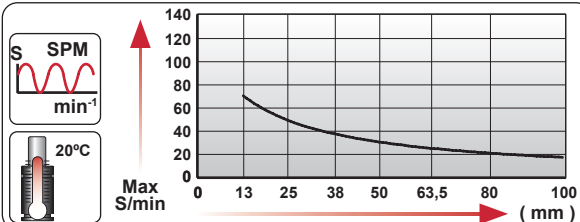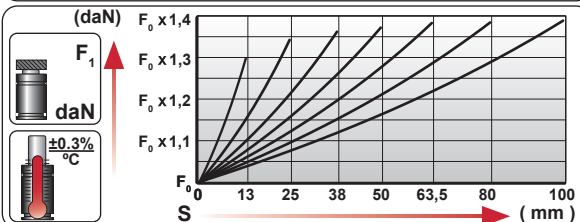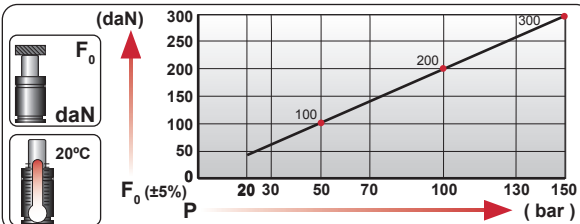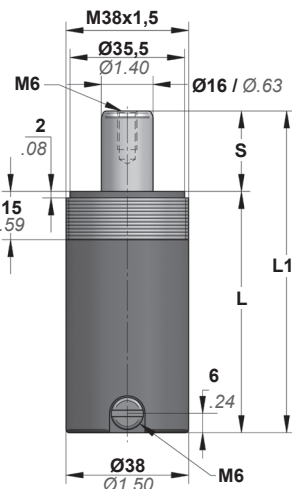

БЕЗОПАСНОСТЬ VDI



СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
ASP 300 013	13	0.51	76	2.99	63	2.48	300	674	390	877	11	0.7	0.45	0.99
ASP 300 025	25	0.98	100	3.94	75	2.95	±5% 150 bar 2175 psi at 20°C 68°F		403	906	20	1.2	0.51	1.12
ASP 300 038	38	1.50	126	4.96	88	3.46			409	919	29	1.8	0.58	1.28
ASP 300 050	50	1.97	150	5.91	100	3.94			412	926	37	2.3	0.64	1.41
ASP 300 063	63.5	2.50	177	6.97	113.5	4.47			414	930	46	2.8	0.70	1.54
ASP 300 080	80	3.15	210	8.27	130	5.12	416	934	58	3.5	0.79	1.74		
ASP 300 100	100	3.94	250	9.84	150	5.91	417	937	72	4.4	0.89	1.96		

ВАРИАНТЫ КРЕПЛЕНИЯ



КАК ЗАКАЗАТЬ

Верхнее
крепление



E08-038



ТЕХНИЧЕСКИЕ ДАННЫЕ



Газ

 N_2 

Pmin Pmax
20°C / 68°F

Tmin Tmax

Изменение силы зависимости температуры

20 bar **150 bar**
290 psi *2175 psi*

0 °C	80 °C
32 °F	176 °F

±0,3% / °C



Зарядка
Адаптер

06 CG 2-Q



Соединение



комплект
портриджей

1628C225E