

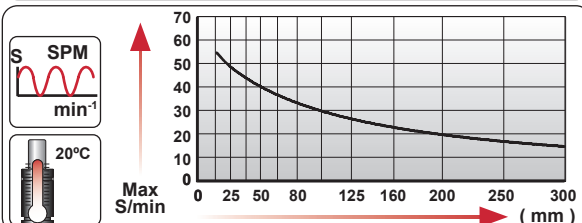
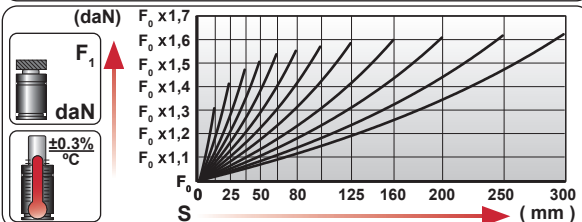
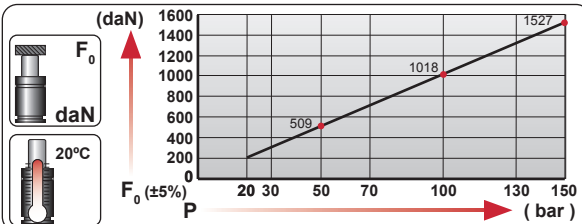
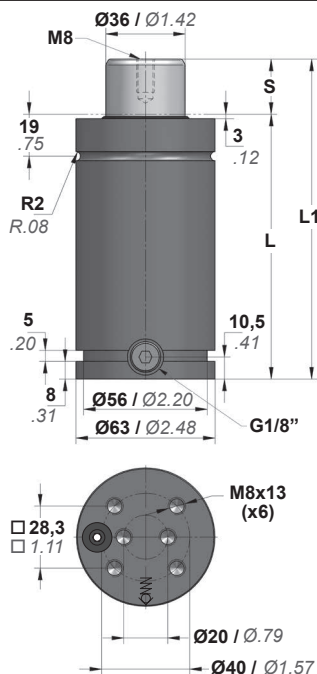
CD 1500 V2

Тяжелые условия



MOLDIS

mould and die sets

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	Kg.	lb
CD 1500 013 V2	13	0.51	121	4.76	108	4.25	1530 3440 ±5% 150 bar 2175 psi at 20°C 68°F		2000	4496	56	3.4	2.02	4.45
CD 1500 025 V2	25	0.98	145	5.71	120	4.72			2160	4856	87	5.3	2.17	4.78
CD 1500 038 V2	38	1.50	171	6.73	133	5.24			2251	5061	121	7.4	2.33	5.14
CD 1500 050 V2	50	1.97	195	7.68	145	5.71			2303	5177	152	9.3	2.48	5.47
CD 1500 063 V2	63.5	2.50	222	8.74	158.5	6.24			2342	5265	186	11.4	2.64	5.82
CD 1500 080 V2	80	3.15	255	10.04	175	6.89			2375	5339	229	14.0	2.84	6.26
CD 1500 100 V2	100	3.94	295	11.61	195	7.68			2402	5399	280	17.1	3.09	6.81
CD 1500 125 V2	125	4.92	345	13.58	220	8.66			2425	5451	345	21.0	3.39	7.47
CD 1500 160 V2	160	6.30	415	16.34	255	10.04			2446	5498	435	26.5	3.82	8.42
CD 1500 200 V2	200	7.87	495	19.49	295	11.61			2461	5533	538	32.8	4.31	9.50
CD 1500 250 V2	250	9.84	595	23.43	345	13.58			2474	5562	667	40.7	4.92	10.85
CD 1500 300 V2	300	11.81	695	27.36	395	15.55			2483	5582	796	48.6	5.54	12.21

ТЕХНИЧЕСКИЕ ДАННЫЕ

Газ		N ₂	Pmin Pmax 20°C / 68°F		20 bar	150 bar	Зарядка Адаптер	18 CG 1-Q
Smax		< 90%	Tmin Tmax		0 °C	80 °C		
Vmax		1,6 m/s	Изменение силы в зависимости от температуры		32 °F	176 °F	Соединение	CD-H 1500 XXX V2
			±0,3% / °C					
							Комплект картриджей	3652L440A

**MOLDIS**

mould and die sets

CD 1500 V2

Тяжелые условия

	50 Ø63 L1=144 L1=152 L1=154	50 Ø63 L1=152 L1=160	50 Ø63 L1=185 L1=195	50 Ø63 L1=175 L1=190	50 Ø63 L1=205
	МОДЕЛЬ CW 1500 KZ/KT 1500 CWC 1500	CT 1500 CK 1500	CM 1500 CD 1500	CPH 2800 CP 3000	CS 3000

ВАРИАНТЫ КРЕПЛЕНИЯ

	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление
КАК ЗАКАЗАТЬ		A14-063 581 A39-063 583 A69-063 583	B21-075 590 B76-075 594	C05-063 596 C35-063 599	D02-063 600 D67-063 602