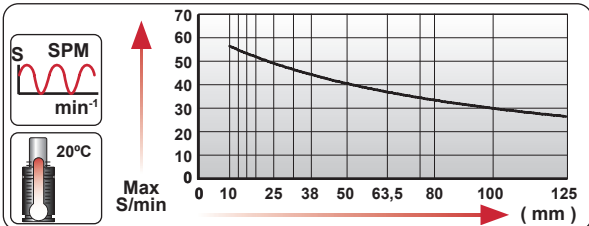
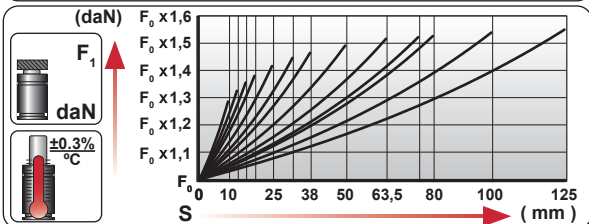
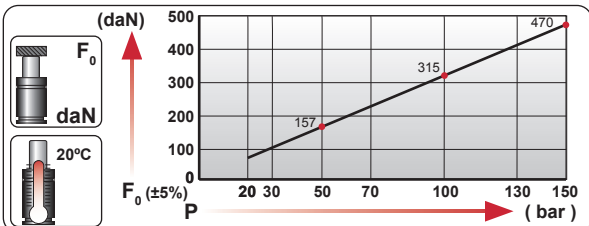
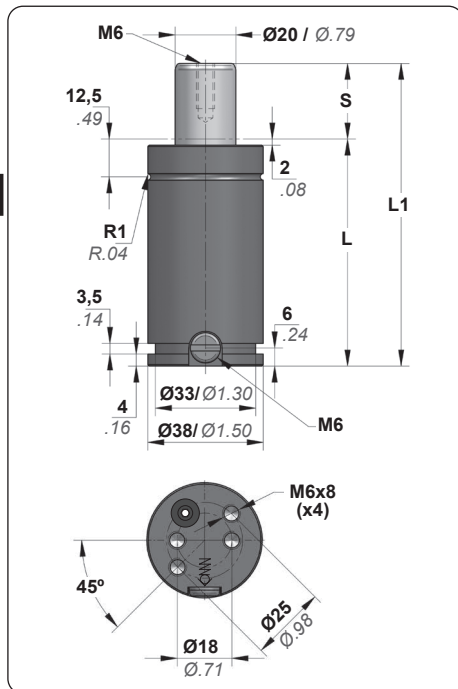


CD 500 V1

Тяжелые условия

**MOLDIS**

mould and die sets

**БЕЗОПАСНОСТЬ**
VDI**СТАНДАРТ**

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
CD 500 010 V1	10	0.39	70	2.76	60	2.36	470	1057	604	1358	14	0.9	0.38	0.84
CD 500 013 V1	13	0.51	76	2.99	63	2.48			622	1399	17	1.0	0.40	0.88
CD 500 016 V1	16	0.63	82	3.23	66	2.60			637	1431	19	1.2	0.41	0.90
CD 500 019 V1	19	0.75	88	3.46	69	2.72			648	1457	22	1.3	0.43	0.95
CD 500 025 V1	25	0.98	100	3.94	75	2.95	±5% 150 bar 2175 psi at 20°C 68°F		665	1496	27	1.6	0.46	1.01
CD 500 032 V1	32	1.26	114	4.49	82	3.23			679	1527	33	2.0	0.49	1.08
CD 500 038 V1	38	1.50	126	4.96	88	3.46			688	1547	38	2.3	0.52	1.15
CD 500 050 V1	50	1.97	150	5.91	100	3.94			700	1575	48	2.9	0.58	1.28
CD 500 063 V1	63.5	2.50	177	6.97	113.5	4.47			710	1595	59	3.6	0.64	1.41
CD 500 075 V1	75	2.95	200	7.87	125	4.92			715	1608	69	4.2	0.69	1.52
CD 500 080 V1	80	3.15	210	8.27	130	5.12			717	1612	73	4.5	0.72	1.59
CD 500 100 V1	100	3.94	250	9.84	150	5.91			723	1626	90	5.5	0.81	1.79
CD 500 125 V1	125	4.92	300	11.81	175	6.89			728	1637	111	6.8	0.93	2.05

ТЕХНИЧЕСКИЕ ДАННЫЕ

	Газ	N ₂		Pmin Pmax 20°C / 68°F	20 bar 290 psi	150 bar 2175 psi		Зарядка Адаптер	06 CG 2-Q
	Smax	< 90%		Tmin Tmax	0 °C 32 °F	80 °C 176 °F		Соединение	CD-H 500 XXX V1
	Vmax	1,6 m/s		Изменение силы в зависимости от температуры	±0,3% / °C			Комплект картриджей	2030B190B

**MOLDIS**

mould and die sets

CD 500 V1

Тяжелые условия

		Ø38	Ø38	Ø38	Ø38	Ø38	Ø38	Ø38
		L1=130 L1=140	L1=150	L1=132 L1=137 L1=150	L1=150 L1=155	L1=150	L1=155 L1=160	L1=230
МОДЕЛЬ		CW 500 KZ 500	AS 300	CT 500 CK 500 FD 300	CD 500 CM 500	AG 250	CPH 850 CP 1000	CS 1000

ВАРИАНТЫ КРЕПЛЕНИЯ

 КАК ЗАКАЗАТЬ	Вставка Min. 80%L +1,0 Ø+0,5	Верхнее крепление A14-038 580 A34-038 582	Базовое крепление 	Нижнее крепление C20-038 598	Поддерживающее крепление D02-038 600