


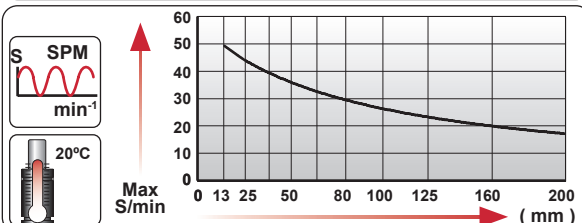
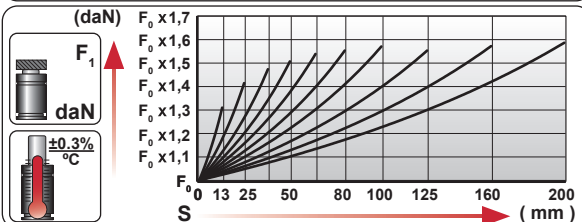
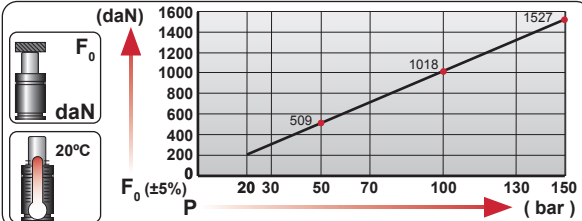
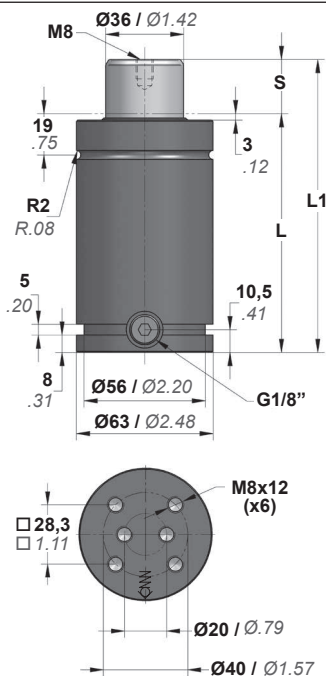
CM 1500 V2

Тяжелые условия



MOLDIS

mould and die sets

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ




ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	Kg.	lb
CM 1500 013 V2	13	0.51	111	4.37	98	3.86	1530 3440 ±5% 150 bar 2175 psi at 20°C 68°F		2005	4508	56	3.4	1.79	3.95
CM 1500 025 V2	25	0.98	135	5.31	110	4.33			2165	4867	87	5.3	1.95	4.30
CM 1500 038 V2	38	1.50	161	6.34	123	4.84			2256	5071	120	7.3	2.11	4.65
CM 1500 050 V2	50	1.97	185	7.28	135	5.31			2307	5185	151	9.2	2.26	4.98
CM 1500 063 V2	63.5	2.50	212	8.35	148.5	5.85			2345	5272	186	11.3	2.43	5.36
CM 1500 080 V2	80	3.15	245	9.65	165	6.50			2377	5345	228	13.9	2.64	5.82
CM 1500 100 V2	100	3.94	285	11.22	185	7.28			2404	5404	280	17.1	2.89	6.37
CM 1500 125 V2	125	4.92	345	13.58	220	8.66			2377	5345	357	21.8	3.29	7.25
CM 1500 160 V2	160	6.30	415	16.34	255	10.04			2407	5410	447	27.3	3.73	8.22
CM 1500 200 V2	200	7.87	495	19.49	295	11.61			2429	5460	550	33.6	4.24	9.35

ТЕХНИЧЕСКИЕ ДАННЫЕ

Газ		N ₂	Pmin Pmax 20°C / 68°F		20 bar 290 psi	150 bar 2175 psi	Зарядка Адаптер	18 CG 1-Q
Smax		< 90%	Tmin Tmax		0 °C 32 °F	80 °C 176 °F		
Vmax		1,6 m/s	Изменение силы в зависимости от температуры		±0,3% / °C		Соединение	CM-H 1500 XXX V2
							Комплект картриджей	3652L440A

	    	   	   	   	  
					
					
МОДЕЛЬ	CW 1500 KZ/KT 1500 CWC 1500	CT 1500 CK 1500	CM 1500 CD 1500	CPH 2800 CP 3000	CS 3000

ВАРИАНТЫ КРЕПЛЕНИЯ					
	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление 
КАК ЗАКАЗАТЬ		A14-063  581 A39-063  583 A69-063  583	B21-075  590 B76-063  594 B76-075  594	C05-063  596 C30-063  599 C35-063  599	D02-063  600 D67-063  602