

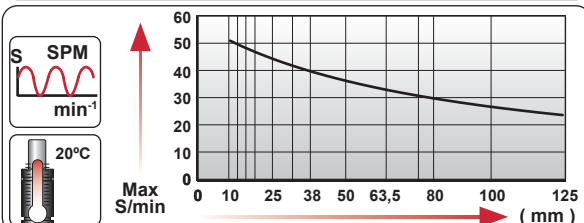
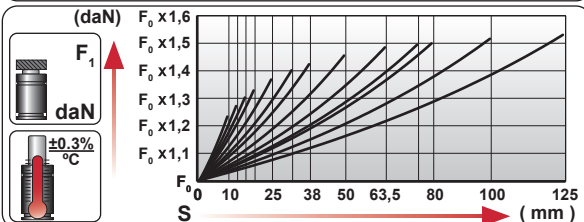
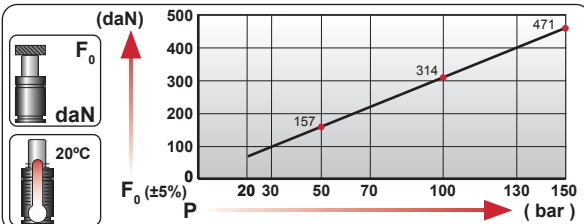
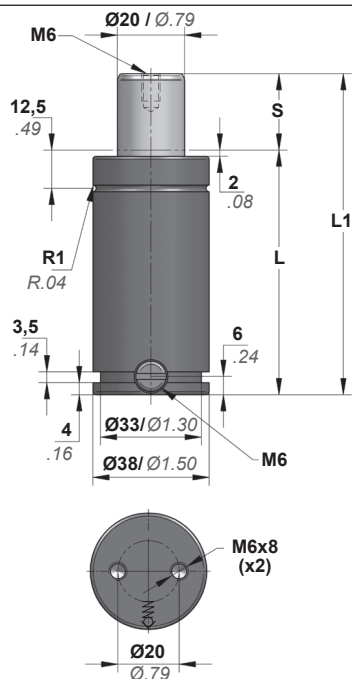
CM 500 V2

Тяжелые условия



MOLDIS

mould and die sets

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
CM 500 010 V2	10	0.39	75	2.95	65	2.56	470	1057	580	1305	17	1.0	0.42	0.93
CM 500 013 V2	13	0.51	81	3.19	68	2.68			598	1345	19	1.2	0.43	0.95
CM 500 016 V2	16	0.63	87	3.43	71	2.80			613	1378	22	1.3	0.45	0.99
CM 500 019 V2	19	0.75	93	3.66	74	2.91			625	1405	24	1.5	0.46	1.01
CM 500 025 V2	25	0.98	105	4.13	80	3.15	±5% 150 bar 2175 psi at 20°C 68°F	644	1447	29	1.8	0.49	1.08	
CM 500 032 V2	32	1.26	119	4.69	87	3.43		660	1483	35	2.1	0.52	1.15	
CM 500 038 V2	38	1.50	131	5.16	93	3.66		670	1506	40	2.4	0.55	1.21	
CM 500 050 V2	50	1.97	155	6.10	105	4.13		685	1539	50	3.1	0.61	1.34	
CM 500 063 V2	63.5	2.50	187	7.36	123.5	4.86		696	1565	61	3.7	0.69	1.52	
CM 500 075 V2	75	2.95	210	8.27	135	5.31		703	1581	71	4.3	0.75	1.65	
CM 500 080 V2	80	3.15	220	8.66	140	5.51		706	1586	75	4.6	0.77	1.70	
CM 500 100 V2	100	3.94	260	10.24	160	6.30		713	1604	92	5.6	0.87	1.92	
CM 500 125 V2	125	4.92	310	12.20	185	7.28	720	1619	113	6.9	0.98	2.16		

ТЕХНИЧЕСКИЕ ДАННЫЕ

Газ N ₂ Smax Vmax	Pmin Pmax 20°C / 68°F Tmin Tmax Изменение силы в зависимости от температуры	20 bar 150 bar 290 psi 2175 psi 0 °C 80 °C 32 °F 176 °F ±0,3% / °C	Зарядка Адаптер Соединение Комплект картриджей	06 CG 2-Q CM-H 500 XXX V2 2030B190B

**MOLDIS**



mould and die sets

CM 500 V2

Тяжелые условия

  								
		Ø38 L1=130 L1=140	Ø38 L1=150	Ø38 L1=132 L1=137 L1=150	Ø38 L1=150 L1=155	Ø38 L1=150	Ø38 L1=155 L1=160	Ø38 L1=230
	МОДЕЛЬ	CW 500 KZ 500	AS 300	CT 500 CK 500 FD 300	CD 500 CM 500	AG 250	CPH 850 CP 1000	CS 1000

ВАРИАНТЫ КРЕПЛЕНИЯ

	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление 
КАК ЗАКАЗАТЬ		A14-038  580 A34-038  582		C20-038  598	D67-038  602