

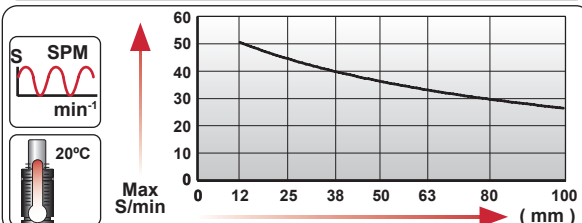
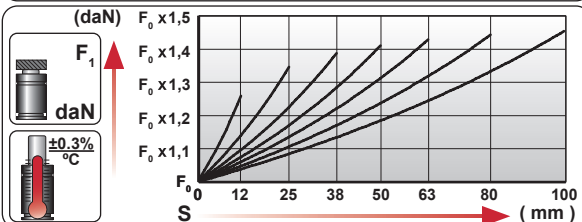
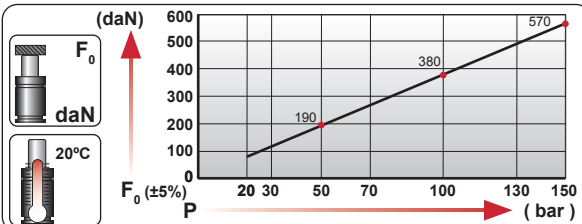
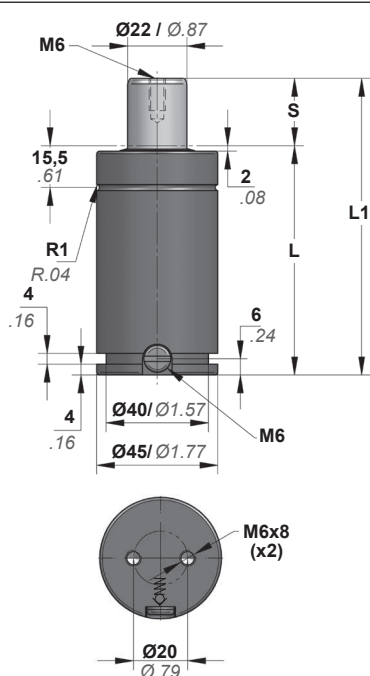
CM 600 V1

Тяжелые условия



MOLDIS

mould and die sets

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
CM 600 012 V1	12	0.47	84	3.31	72	2.83	570 1281 ±5% 150 bar 2175 psi at 20°C 68°F		813	1827	20	1.2	0.69	1.52
CM 600 025 V1	25	0.98	110	4.33	85	3.35			859	1931	36	2.2	0.77	1.70
CM 600 038 V1	38	1.50	136	5.35	98	3.86			878	1973	53	3.2	0.85	1.87
CM 600 050 V1	50	1.97	160	6.30	110	4.33			887	1994	69	4.2	0.92	2.03
CM 600 063 V1	63	2.48	186	7.32	123	4.84			893	2009	85	5.2	1.01	2.23
CM 600 080 V1	80	3.15	220	8.66	140	5.51			899	2021	107	6.5	1.11	2.45
CM 600 100 V1	100	3.94	260	10.24	160	6.30			903	2030	133	8.1	1.23	2.71

ТЕХНИЧЕСКИЕ ДАННЫЕ

Газ Smax Vmax	N ₂ < 90% 1,6 m/s	Pmin Pmax 20°C / 68°F Tmin Tmax 0°C / 32°F 80°C / 176°F Изменение силы в зависимости от температуры	20 bar / 290 psi 150 bar / 2175 psi 0°C / 32°F 80°C / 176°F ±0,3% / °C	Зарядка Адаптер Соединение Комплект картриджей	06 CG 2-Q CM-H 600 XXX V1 2238E250B

**MOLDIS**

mould and die sets

CM 600 V1

Тяжелые условия

 		 Ø45 L1=132 L1=142 L1=147		 Ø45 L1=138 L1=150 L1=150	 Ø45 L1=160 L1=185	 Ø45 L1=185	 Ø45 L1=160	
МОДЕЛЬ		CW 750 CWC 750 KZ 750		CT 700 CK 750 FD 500	CM 600 CD 700	AG 500	CPH 1250	

ВАРИАНТЫ КРЕПЛЕНИЯ

	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление
КАК ЗАКАЗАТЬ		A14-045 581 A34-045 582		C20-045 598	D67-045 602