



CP 5000 V1

Тяжелая нагрузка

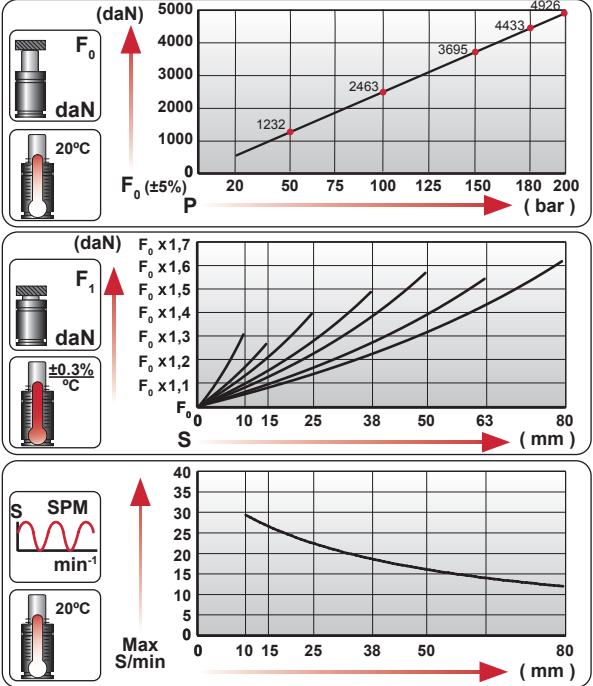

MOLDIS
mould and die sets

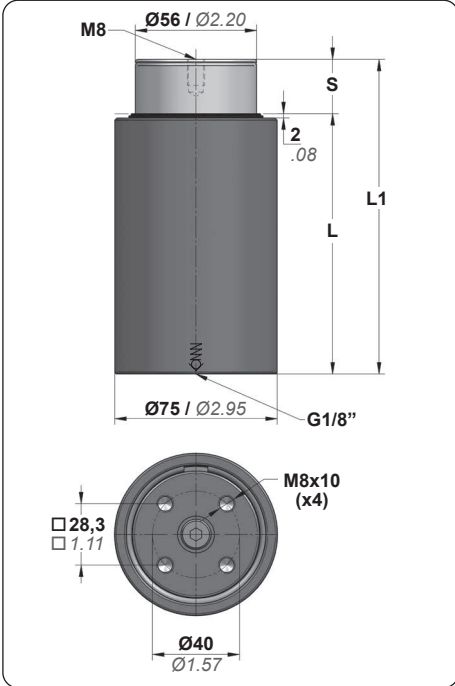

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ
APPROVED PED

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	Kg.	lb
CP 5000 010 V1	10	0.39	100	3.94	90	3.54	4925 ±5% 200 bar 2900 psi at 20°C 68°F	11072	6450	14501	104	6.4	2.30	5.07
CP 5000 015 V1	15	0.59	125	4.92	110	4.33			6250	14050	174	10.6	2.54	5.60
CP 5000 025 V1	25	0.98	145	5.71	120	4.72			6881	15469	217	13.2	2.75	6.06
CP 5000 038 V1	38	1.50	175	6.89	137	5.39			7338	16495	285	17.4	3.05	6.72
CP 5000 050 V1	50	1.97	200	7.87	150	5.91			7739	17398	339	20.7	3.31	7.30
CP 5000 063 V1	63	2.48	240	9.45	177	6.97			7614	17116	439	26.8	3.71	8.18
CP 5000 080 V1	80	3.15	275	10.83	195	7.68			7981	17942	515	31.4	4.07	8.97

ТЕХНИЧЕСКИЕ ДАННЫЕ

Газ

N₂

Smax

< 90%

Vmax

0,5 m/s

Pmin Pmax
20°C / 68°F

Tmin Tmax

Изменение силы
в зависимости
от температуры

20 bar 200 bar
290 psi 2900 psi

0 °C 80 °C
32 °F 176 °F

±0,3% / °C

Зарядка
Адаптер

18 CG 1-Q



Соединение

X

Набор
уплотнителей

S-XXXXXXX

		 Ø75 L1=145 L1=155 L1=159		 Ø75 L1=154 L1=160 L1=160	 Ø75 L1=185 L1=195 L1=210	 Ø75 L1=210	 Ø75 L1=175 L1=200	 Ø75 L1=240
								
								
МОДЕЛЬ		CW 2400 CWC 2400 KZ/KT 2400		CT 3000 CK 2500 FD 1500	GN 1500 CM 2500 CD 2400	AG 1500	CPH 4300 CP 5000	CS 4700

ВАРИАНТЫ КРЕПЛЕНИЯ					
	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление 
КАК ЗАКАЗАТЬ					