



CPH 1250 V1

Тяжелая нагрузка

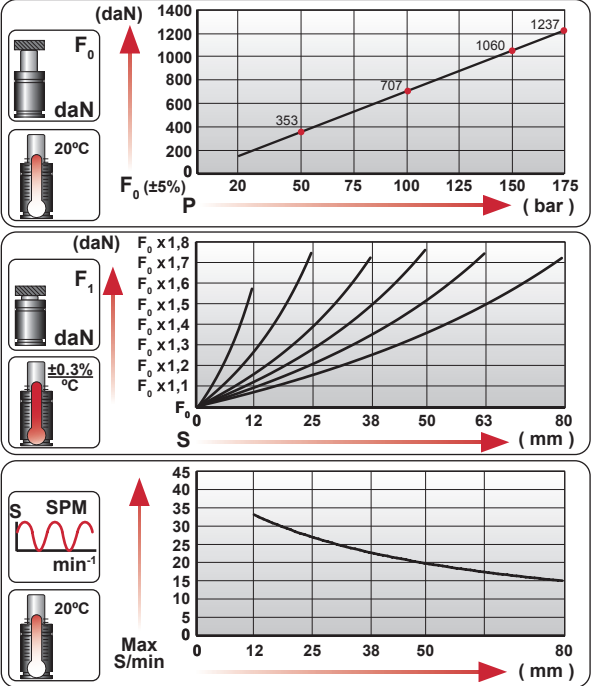

MOLDIS
mould and die sets

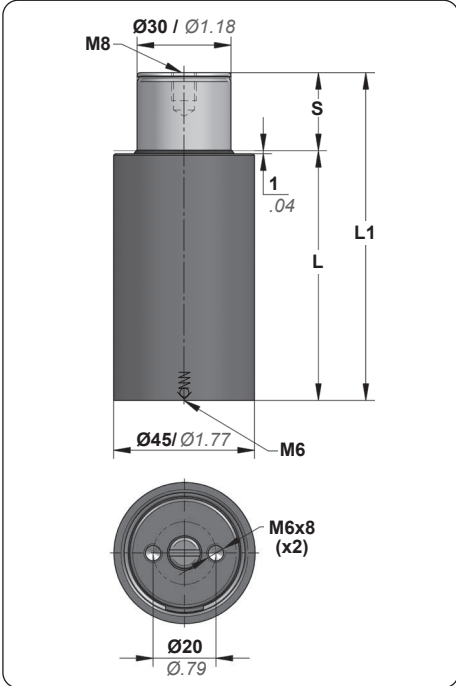

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
CPH 1250 012 V1	12	0.47	79	3.11	67	2.64	1200 ±5% 170 bar 2465 psi at 20°C 68°F	2698	1934	4348	22	1.4	0.64	1.41
CPH 1250 025 V1	25	0.98	105	4.13	80	3.15			2133	4795	40	2.5	0.74	1.63
CPH 1250 038 V1	38	1.50	135	5.31	97	3.82			2092	4703	63	3.8	0.84	1.85
CPH 1250 050 V1	50	1.97	160	6.30	110	4.33			2133	4796	81	4.9	0.93	2.05
CPH 1250 063 V1	63	2.48	190	7.48	127	5.00			2108	4739	103	6.3	1.04	2.29
CPH 1250 080 V1	80	3.15	230	9.06	150	5.91			2079	4673	134	8.2	1.18	2.60

ТЕХНИЧЕСКИЕ ДАННЫЕ													
Газ		N ₂		Pmin Pmax 20°C / 68°F		20 bar 175 bar 290 psi 2540 psi		Tmin Tmax 0 °C 80 °C 32 °F 176 °F		Зарядка Адаптер		06 CG 2-Q	
Smax		< 90%		Tmin Tmax		0 °C 80 °C 32 °F 176 °F		Соединение				X	
Vmax		0,5 m/s		Изменение силы в зависимости от температуры		±0,3% / °C		Набор уплотнителей				S-XXXXXXX	