



CWC 2400 V2

Компактная высота

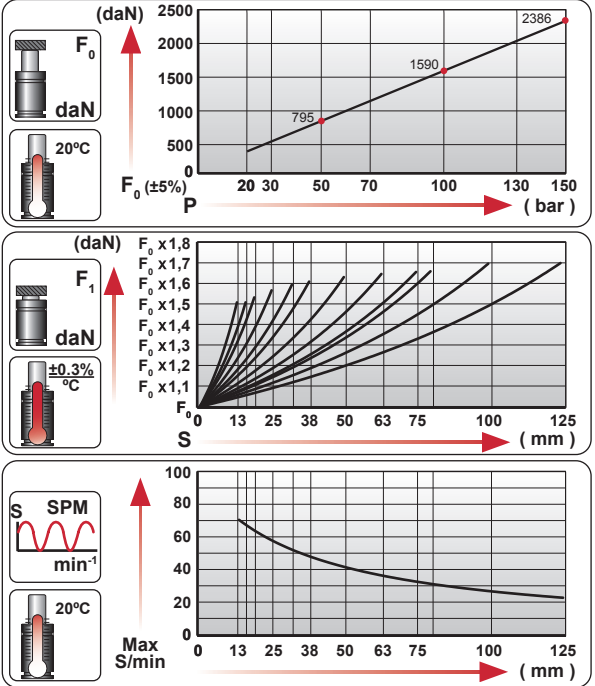

БЕЗОПАСНОСТЬ VDI

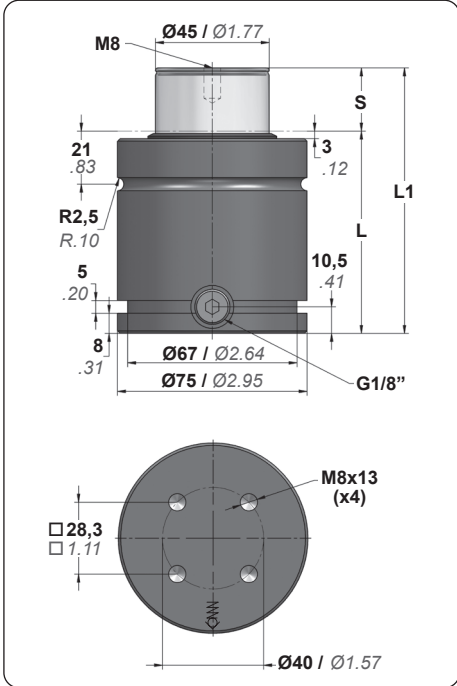

СТАНДАРТ



ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.				
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³			
CWC 2400 013 V2	13	0.51	81	3.19	68	2.68	2385	5362	3592	8075	62	3.8	1.73	3.81	
CWC 2400 016 V2	16	0.63	87	3.43	71	2.80			3661	8230	73	4.5	1.78	3.92	
CWC 2400 019 V2	19	0.75	93	3.66	74	2.91			3713	8347	84	5.2	1.84	4.06	
CWC 2400 025 V2	25	0.98	105	4.13	80	3.15			±5% 150 bar 2175 psi at 20°C 68°F	3786	8512	107	6.6	1.94	4.28
CWC 2400 032 V2	32	1.26	119	4.69	87	3.43				3842	8637	134	8.2	2.06	4.54
CWC 2400 038 V2	38	1.50	131	5.16	93	3.66				3876	8713	157	9.6	2.16	4.76
CWC 2400 050 V2	50	1.97	155	6.10	105	4.13				3921	8814	203	12.4	2.37	5.22
CWC 2400 063 V2	63	2.48	181	7.13	118	4.65				3952	8883	253	15.4	2.59	5.71
CWC 2400 075 V2	75	2.95	205	8.07	130	5.12				3971	8928	299	18.2	2.80	6.17
CWC 2400 080 V2	80	3.15	215	8.46	135	5.31			3978	8942	318	19.4	2.88	6.35	
CWC 2400 100 V2	100	3.94	255	10.04	155	6.10			3998	8987	394	24.1	3.22	7.10	
CWC 2400 125 V2	125	4.92	305	12.01	180	7.09			4014	9024	490	29.9	3.65	8.05	

ТЕХНИЧЕСКИЕ ДАННЫЕ													
	Газ	N ₂		Pmin	Pmax	20 bar	150 bar		290 psi	2175 psi		Зарядка	18 CG 1-Q
	Smax	< 90%		Tmin	Tmax	0 °C	80 °C		32 °F	176 °F		Соединение	CWC-H 2400 XXX V2
	Vmax	1,6 m/s		Изменение силы в зависимости от температуры		±0,3% / °C			Комплект картриджей		4563L245A		

**MOLDIS**

mould and die sets

CWC 2400 V2

Компактная высота

								
								
								
								
МОДЕЛЬ		CW 2400 CWC 2400 KZ/KT 2400		CT 3000 CK 2500 FR 1500	GN 1500 CM 2500 CD 2400	AG 1500	CPH 4300 CP 5000	CS 4700