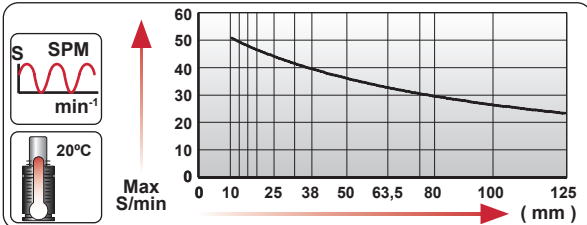
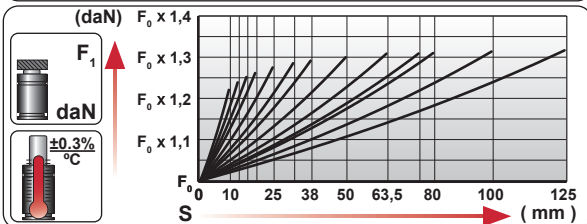
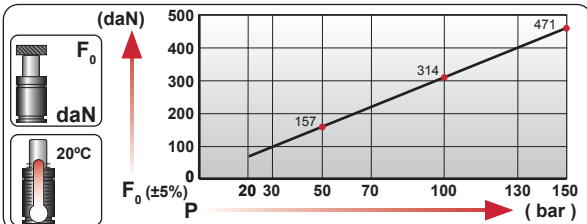
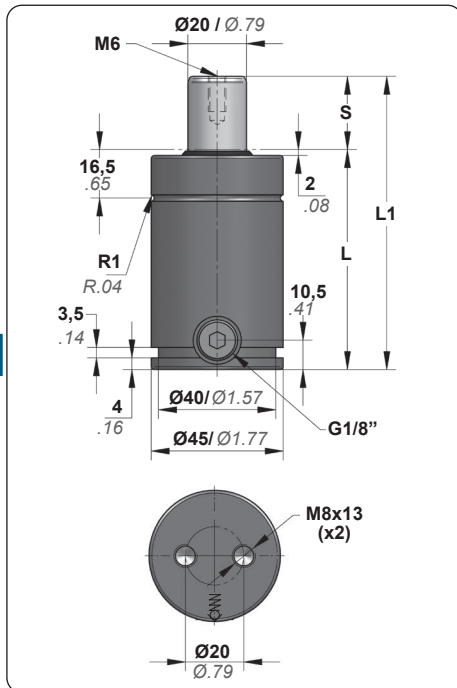


FD 500

Низкий профиль

		RENAULT EM24.54.700

**MOLDIS**
mould and die sets**БЕЗОПАСНОСТЬ**
VDI**СТАНДАРТ**

EM.24.54

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	Kg.	lb
FD 500 010	10	0.39	70	2.76	60	2.36	470	1057	574	1290	17	1.1	0.54	1.19
FD 500 013	13	0.51	76	2.99	63	2.48			582	1309	21	1.3	0.56	1.23
FD 500 016	16	0.63	82	3.23	66	2.60			588	1323	25	1.5	0.57	1.26
FD 500 019	19	0.75	88	3.46	69	2.72			593	1333	29	1.8	0.59	1.30
FD 500 025	25	0.98	100	3.94	75	2.95			599	1348	36	2.2	0.62	1.37
FD 500 032	32	1.26	114	4.49	82	3.23			604	1359	45	2.8	0.65	1.43
FD 500 038	38	1.50	126	4.96	88	3.46			607	1365	53	3.2	0.68	1.50
FD 500 050	50	1.97	150	5.91	100	3.94			611	1374	68	4.2	0.74	1.63
FD 500 063	63.5	2.50	177	6.97	113.5	4.47			614	1380	85	5.2	0.81	1.79
FD 500 075	75	2.95	200	7.87	125	4.92			615	1384	100	6.1	0.87	1.92
FD 500 080	80	3.15	210	8.27	130	5.12			616	1385	106	6.5	0.89	1.96
FD 500 100	100	3.94	250	9.84	150	5.91			618	1389	131	8.0	0.99	2.18
FD 500 125	125	4.92	300	11.81	175	6.89			619	1392	163	10.0	1.12	2.47

ТЕХНИЧЕСКИЕ ДАННЫЕ

	Газ	N ₂		Pmin Pmax 20°C / 68°F	20 bar 150 bar 290 psi 2175 psi		Tmin Tmax 32°F 176°F		Зарядка Адаптер	18 CG 1-Q
	Smax	< 90%		Tmin Tmax	80°C 176°F				Соединение	FD-H 500 XXX
	Vmax	1,6 m/s		Изменение силы в зависимости от температуры	±0,3% / °C		Комплект картриджей			2038E190B

**MOLDIS**

mould and die sets

FD 500

Низкий профиль

 		 Ø45 L1=132 L1=142 L1=147		 Ø45 L1=138 L1=150 L1=150	 Ø45 L1=160 L1=185	 Ø45 L1=185	 Ø45 L1=160	
МОДЕЛЬ		CW 750 CWC 750 KZ 750		CT 700 CK 750 FD 500	CM 600 CD 700	AG 500	CPH 1250	

ВАРИАНТЫ КРЕПЛЕНИЯ

	Вставка 	Верхнее крепление 	Базовое крепление 	Нижнее крепление 	Поддерживающее крепление
КАК ЗАКАЗАТЬ		A14-045 581 A34-045 582	B21-045 590 B76-045 594	C05-045 596 C20-045 598	D02-045 600 D67-045 602