

CA.05.01

Ø 10-14-20

. Spring loaded vacuum cup arm (Non-rotational shaft)

. Greifarm gefedert verdrehgesichert

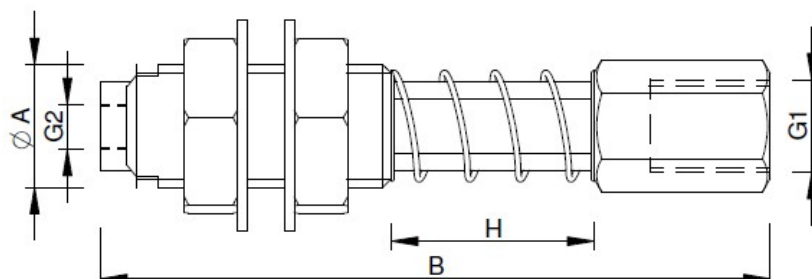
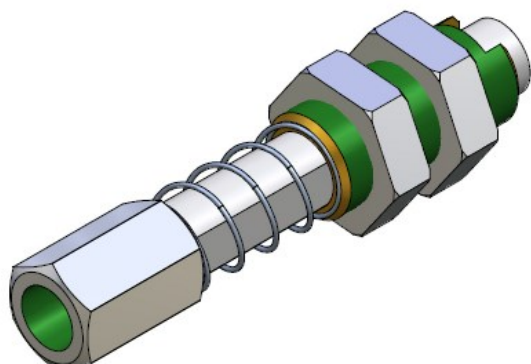


Table / Tabelle

H = Spring deflection
Federweg

F = Spring force
Federkraft

Remarks / Anmerkungen:

Brass material
Messing

Non rotational
Verdrehgesichert

Threaded tube
Gewindeschaft

Article no.	A	B	G1	G2	H	F(N)	Weight
CA.05.01.001	M14x1.5	100	G 1/8	M5	38	23.2	75 g
CA.05.01.002	M20x1.5	125	G 1/4	G 1/8	48	16.7	97 g
CA.05.01.003	M14x1.5	76	G 1/8	M5	17	20.7	63 g
CA.05.01.004	M20x1.5	100	G 1/4	G 1/8	25	18.4	161 g
CA.05.01.005	M10x1	69	M5	M5	20	3.4	31 g
CA.05.01.005.6N						6	
CA.05.01.006		59			10	4.8	28 g
CA.05.01.006.6N						6	
CA.05.01.010	M16x1.5	76	G 1/8		17	20.7	85 g
CA.05.01.011		100			38	23.2	95 g
CA.05.01.50	M14x1.5	123			50	17	88 g
CA.05.01.75		153			75	19	102 g
CA.05.01.100		193			100	18	127 g

Application example / Anwendungsbeispiel

CA.04.20...

CA.L.../CA.X.../CA.JU...

