


CA.11 JDR

JDR

. Compact cylinder for vacuum cup, non rotational

. Verdehgesicherter pneumatischer Kurzhubzylinder

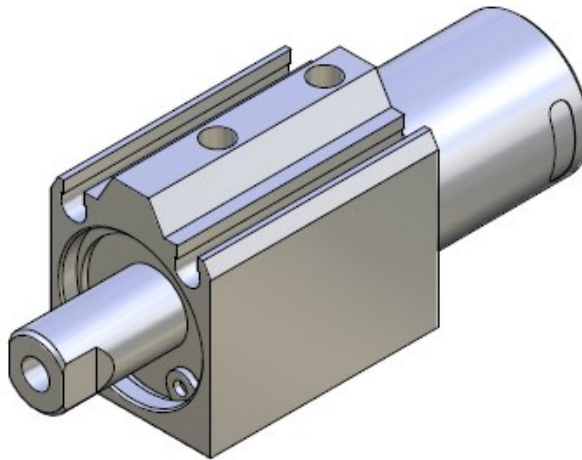

Article no.	Piston bore	Stroke	Sensor(optional)	Weight
CA.JDR.141005	Ø 14	10	PNP =KT58P3M KT58PM8 NPN = KT58N3M KT58NM8	54 g
CA.JDR.142505		25		76 g
CA.JDR.201005	Ø 20	10		63 g
CA.JDR.301518	Ø 30	15		112 g
CA.JDR.303018		30		150 g
CA.JDR.305018		50		200 g


Remarks / Anmerkungen:

Cylinder with through rod, non rotational
Verdrehgesicherte Kurzhubzylinder mit Durchgangsbohrung

Suitable for applications with suction cups
Geeignet für Anwendungen mit Vakuum sauger

Available in 6 sizes and 6 different strokes
Verfügbar in 6 verschiedenen Maßen und Hube

Application example / Anwendungsbeispiel

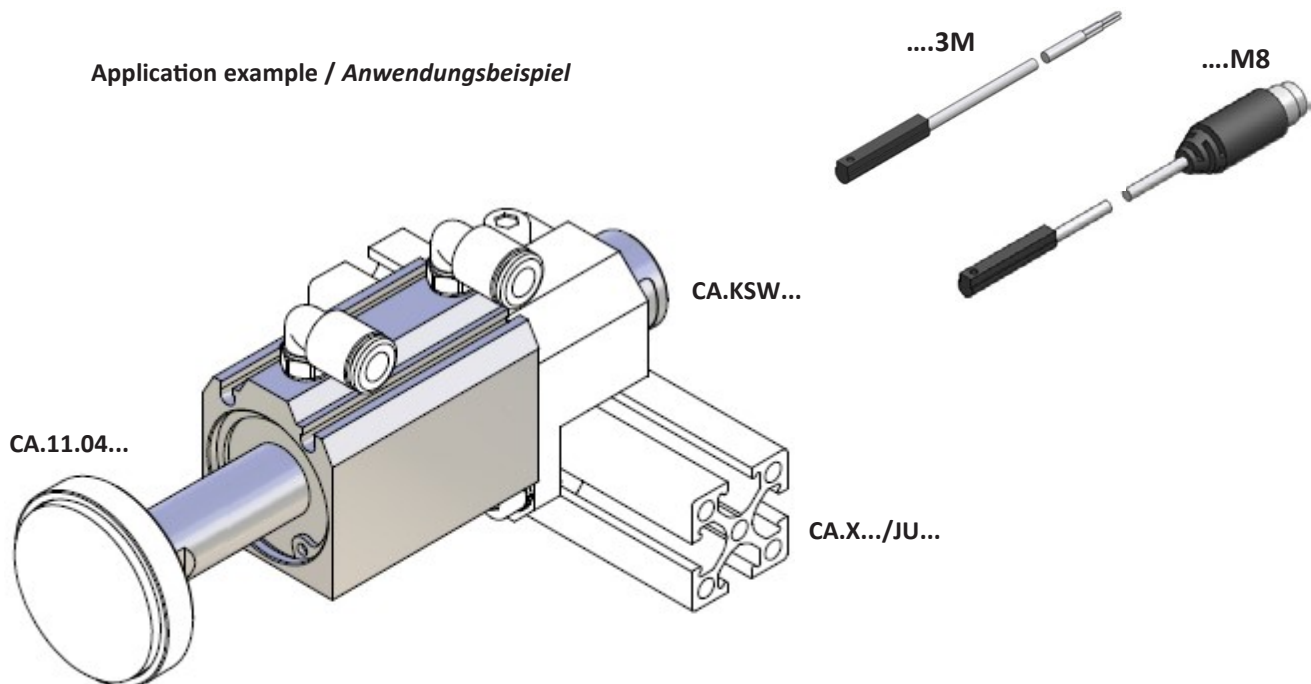


CA.11 JDR

. Dimensions

JDR

. Maße

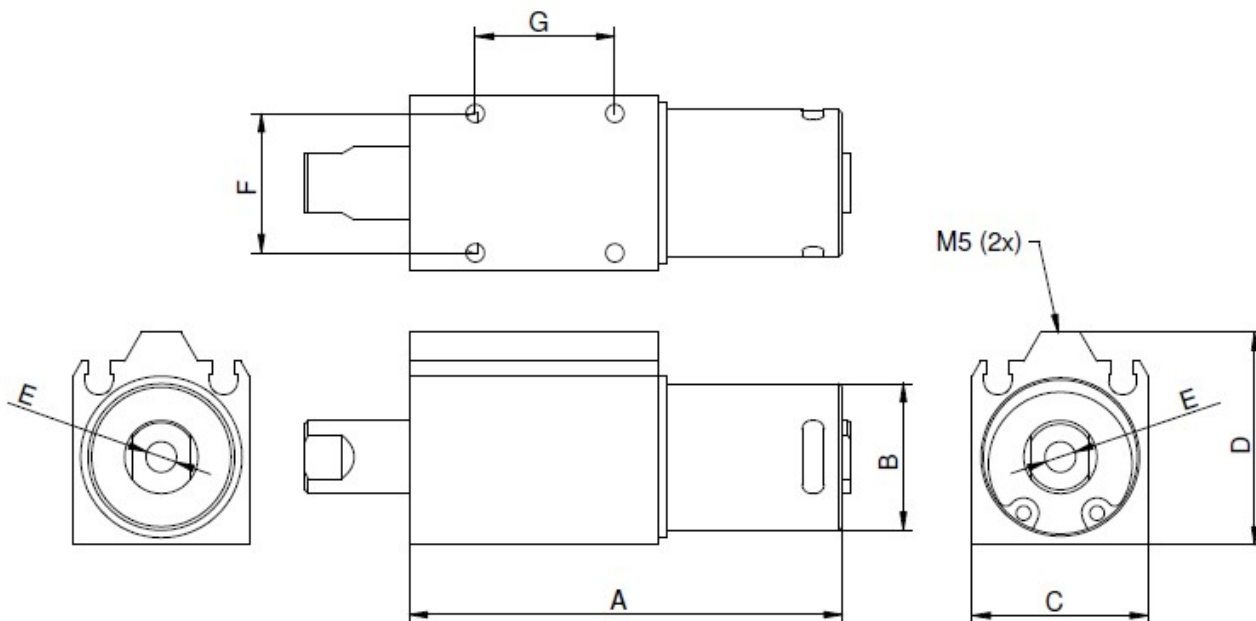

Article no.	A	B	C	D	E	F	G	H
CA.JDR.141005	64	Ø 14	24	29	M5	19	19	10
CA.JDR.142505	94							25
CA.JDR.201005	64	Ø 20	34	39	G 1/8	28	28	10
CA.JDR.301518	72							15
CA.JDR.303018	100							30
CA.JDR.305018	140							50