



KZ 2400

Компактная высота

		RENAULT EM24.54.700
	MAZDA PG230-PG24D	



MOLDIS
mould and die sets

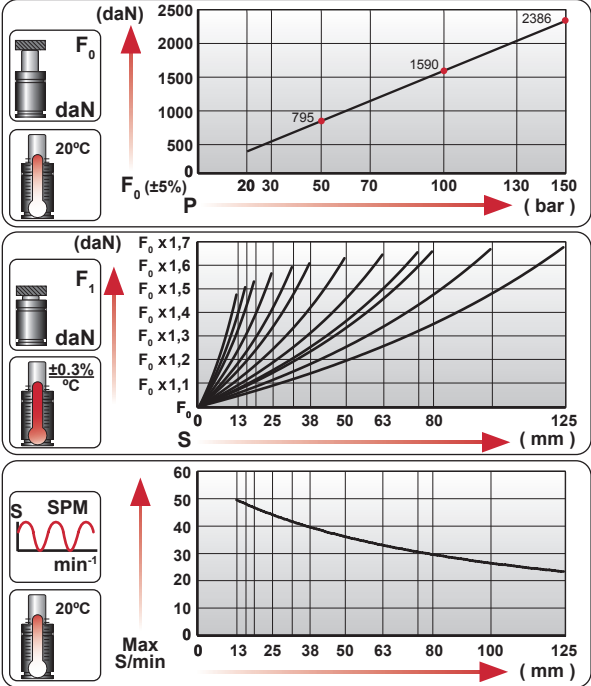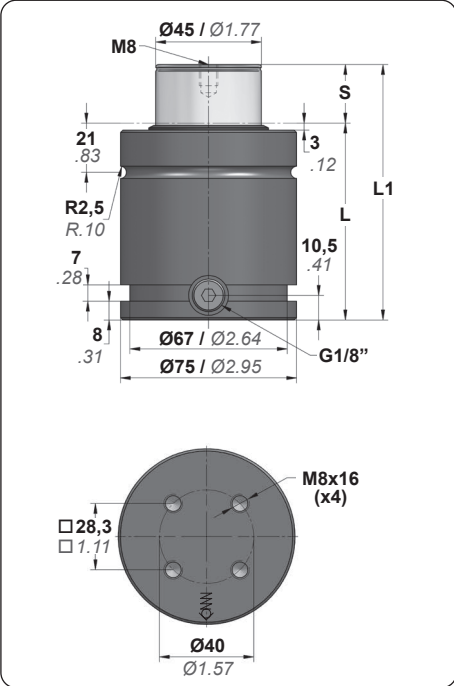

БЕЗОПАСНОСТЬ
VDI

СТАНДАРТ

ЗАКАЗ	S		L1 ±0.25		L		F ₀ Начальное усилие		F ₁ (ИЗОТЕРМИЧЕСКОЕ) Конечное усилие		Vol.			
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	Kg.	lb
KZ 2400 013	13	0.51	85	3.35	72	2.83	2385 5362 ±5% 150 bar 2175 psi at 20°C 68°F		3592	8075	62	3.8	1.86	4.10
KZ 2400 016	16	0.63	91	3.58	75	2.95			3661	8230	73	4.5	1.91	4.21
KZ 2400 019	19	0.75	97	3.82	78	3.07			3713	8347	84	5.2	1.96	4.32
KZ 2400 025	25	0.98	109	4.29	84	3.31			3786	8512	107	6.6	2.06	4.54
KZ 2400 032	32	1.26	123	4.84	91	3.58			3842	8637	134	8.2	2.18	4.81
KZ 2400 038	38	1.50	135	5.31	97	3.82			3876	8713	157	9.6	2.28	5.03
KZ 2400 050	50	1.97	159	6.26	109	4.29			3921	8814	203	12.4	2.49	5.49
KZ 2400 063	63	2.48	185	7.28	122	4.80			3952	8883	253	15.4	2.71	5.97
KZ 2400 075	75	2.95	209	8.23	134	5.28			3971	8928	299	18.2	2.92	6.44
KZ 2400 080	80	3.15	219	8.62	139	5.47			3978	8942	318	19.4	3.01	6.64
KZ 2400 100	100	3.94	259	10.20	159	6.26			3998	8987	394	24.1	3.35	7.39
KZ 2400 125	125	4.92	309	12.17	184	7.24			4014	9024	490	29.9	3.78	8.33

ТЕХНИЧЕСКИЕ ДАННЫЕ										
	Газ	N ₂	 	Pmin Pmax 20°C / 68°F	20 bar 150 bar 290 psi 2175 psi	 	Tmin Tmax 0 °C 80 °C 32 °F 176 °F	 	Зарядка Адаптер	18 CG 1-Q
	Smax	< 90%	 	Tmin Tmax		 	Соединение	 	Комплект картриджей	KZ-H 2400 XXX
	Vmax	1,6 m/s		Изменение силы в зависимости от температуры	±0,3% / °C	 	Комплект картриджей			4563L245A

**MOLDIS**

mould and die sets

KZ 2400

Компактная высота